



# Kingfisher Lighting

Part of the LUCECO group of companies

## Datasheet

### NAPO




### Specification Text

The NAPO shall be manufactured from turned aluminium and powder coated with a graphite grey, aluminium silver or white finish. It shall have a power output ranging from 4.0W, with an efficacy of 63 lm/W. The luminaire shall deliver 250 luminaire lumens. Available in 3000K, 4000K or RGB, the luminaire shall be IK08 and IP65 rated.

### Specification

Weight:	0.3 kg
Material:	Die-cast Aluminium
Paint Finish:	White

### Optics



Symmetrical 80°

### Product Description

NAPO is a small, elegant luminaire perfect for adding accent lighting to any area.

### Key Features

- 4.0W
- 250 Luminaire Lumens
- Efficacy up to 63 lm/W
- 4000K, CRI>80
- IP65, IK08
- Lifetime 60,000, L80
- RGB Opportunities
- Opal Comfort Screen
- Controls Compatible

IP65	IK08	Colour Temperature	Anti-glare	
5 YEARS WARRANTY		60,000 hrs LIFETIME		

## Other Options Available

Contact for further details


- Colour Temperature Opportunities

Body Type	A	B	C
Standard	70	100	16

All measurements in mm

## Mounting Options

- Ceiling and Wall Mount

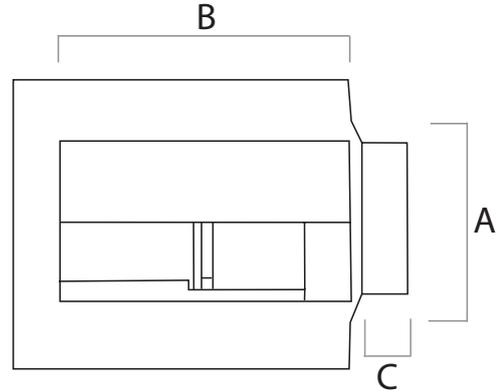

Code	Power	Luminaire Lumens	Drive Current	Optic	CCT(K)	IP	IK	Weight kg	Driver Included	Driver Type
NAP-SY80-830-4-11	4.0	250 $\pm$	-	Symmetrical 80°	3000	IP65	IK08	0.3	No	Fixed
NAP-SY80-840-4-11	4.0	250 $\pm$	-		4000	IP65	IK08	0.3	No	Fixed