



# Kingfisher Lighting

Part of the LUCECO, group of companies

## Datasheet



## VILLA II


### Specification Text

The VILLA II shall be manufactured from high pressure die-cast aluminium and be powder coated with a RAL 9005 Jet Black finish. It shall have a power output ranging from 30 – 60W with an efficacy of 130.0 lm/W. It shall produce 3,588 - 7,270 luminaire lumens. Available in 2700K and 4000K, VILLA II is rated at IP66 and IK08.

### Specification

|                  |                                |
|------------------|--------------------------------|
| Weight:          | 10.7 - 10.8 kg                 |
| Windage:         | 0.35 m <sup>2</sup>            |
| Material:        | Die-cast Aluminium             |
| Paint Finish:    | RAL7016 Anthracite Grey        |
| Embodied Carbon: | 126 - 128 kg CO <sup>2</sup> e |

### Optics



Symmetrical 127°

### Product Description

With a traditional heritage look, VILLA II is the amenity lantern with varying colour temperatures and outputs to promote high efficiency for many sites.



Part of the LUCECO, group of companies

### Key Features

- 30.0W - 60.0W
- 3,588 - 7,270 Luminaire Lumens
- Efficacy up to 130.0 lm/W
- 2700K, 4000K, CRI>70
- IP66, IK08
- Lifetime > 100,000hr, L80
- Dim to Warm Options
- Comfort Options
- 3 Hour Integral Emergency

|      |      |                      |                  |
|------|------|----------------------|------------------|
| IP66 | IK08 | 100,000 hrs LIFETIME | 5 YEARS WARRANTY |
| EM   | PEC  | 2700K                | 4000K            |

### Circular Economy Score

|            |  |
|------------|--|
| 0 to 0.05  | Very poor circular economy performance       |
| 0.5 to 1.5 | Some circular economy functionality          |
| 1.5 to 2.5 | Definite/substantial progress to circularity |
| 2.5 to 4.0 | Excellent circularity                        |

## Other Options Available

Contact for further details


- 3 Hour Integral Emergency
- Colour Temperature Opportunities

## Mounting Options

- Post Top 60mm

| Body Type | A   | B   | C   | D  |
|-----------|-----|-----|-----|----|
| Standard  | 816 | 425 | 425 | 60 |

All measurements in mm

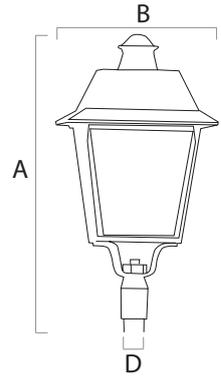

| Code         | Power | Luminaire Lumens | Drive Current | Inrush Current A pk | Optic            | CCT(K) | IP   | IK   | Weight kg | Driver Included | Driver Type |
|--------------|-------|------------------|---------------|---------------------|------------------|--------|------|------|-----------|-----------------|-------------|
| VIL30D-02    | 30.0  | 3,900            | 780           | 24.9                | Symmetrical 127° | 4000   | IP66 | IK08 | 10.7      | Yes             | DALI        |
| VIL30D27K-02 | 30.0  | 3,588            | 780           | 24.9                |                  | 2700   | IP66 | IK08 | 10.7      | Yes             | DALI        |
| VIL60D-02    | 60.0  | 7,270            | 610           | 32.0                |                  | 4000   | IP66 | IK08 | 10.7      | Yes             | DALI        |
| VIL60D27K-02 | 60.0  | 6,688            | 610           | 32.0                |                  | 2700   | IP66 | IK08 | 10.7      | Yes             | DALI        |