



Kingfisher Lighting

Part of the LUCECO group of companies

Datasheet



TOCCA 2.0

Specification Text

The TOCCA 2.0 shall be manufactured from high pressure extruded aluminium. It shall have a power output of 4.2 - 15.4W, with an efficacy of 46-91lm/W. It shall deliver 195 - 716 luminaire lumens. The TOCCA 2.0 is available with a range of different sizes. Available in 2700K, the luminaire shall be IK10 and IP66 rated.

Specification

Weight: 0.1 - 0.5 kg
Windage: 0.08 m²
Material: Extruded Aluminium
Paint Finish: Aluminium

Product Description


Perfect for façade lighting, TOCCA 2.0 has a slim dimension and flexible lengths ideal for recessing into handrails, base boards and so much more.



Key Features

- 4.2W - 15.4W
- 195 - 716 Luminaire Lumens
- Efficacy up to 76.0 lm/W
- 2700K, CRI>80
- IP66, IK10
- Lifetime > 50,000hr
- Frosted diffuser
- Plug and play connector
- Suitable for circular and non-circular profiles

Optics

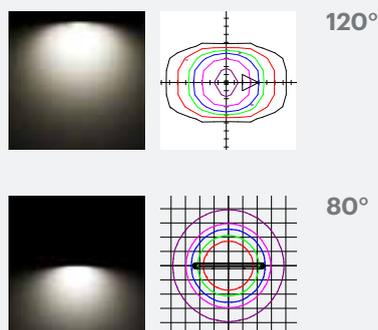

IP66	IK10	100,000 hrs LIFETIME
EM	2700K	5 YEARS WARRANTY

Other Options Available

Contact for further details


- Emergency Options

Body Type	A	B	C
Standard	380	16	20

All measurements in mm

Mounting Options

- Surface mount



Code	Power	Luminaire Lumens	Drive Current	Optic	CCT(K)	IP	IK	Weight kg	Driver Included	Driver Type
TOC4-SY120-380-OPAL-D	4.2	195	-		2700	IP66	IK10	0.1	No	Fixed
TOC8-SY120-680-OPAL-D	8.4	391	-	Symmetrical 120°	2700	IP66	IK10	0.3	No	Fixed
TOC15-SY120-1180-OPAL-D	15.4	716	-		2700	IP66	IK10	0.5	No	Fixed
TOCH4-SY80-380-FROST-D	4.2	319	-	Symmetrical 80°	2700	IP66	IK10	0.1	No	Fixed
TOC4-SY120-380-OPAL-D	4.2	195	-		2700	IP66	IK10	0.15	No	Fixed
TOC8-SY120-680-OPAL-D	8.4	390	-	Symmetrical Opal diffuser	2700	IP66	IK10	0.27	No	Fixed
TOC15-SY120-1180-OPAL-D	15.4	716	-		2700	IP66	IK10	0.27	No	Fixed
TOCH4-SY80-380-FROST-D	4.2	319	-	Symmetrical Frosted diffuser	2700	IP66	IK10	0.15	No	Fixed

Code	Driver Code	Fixtures per driver	Rated Power	Breaker Information	Maximum Cable Run @ 2.5mm
TOC15-SY120-1180-OPAL-D		4			
TOCH4-SY80-380-FROST-D	DRIVER20	4	20W	20W 8 units (type B) / 14 units (type C) at 230VA	30m
TOC8-SY120-680-OPAL-D		2			
TOC15-SY120-1180-OPAL-D		1			
TOC4-SY120-380-OPAL-D		8			
TOCH4-SY80-380-FROST-D	DRIVER36	8	36W	4 units (type B) / 7 units (type C) at 230VA	30m
TOC8-SY120-680-OPAL-D		4			
TOC15-SY120-1180-OPAL-D		2			
TOC4-SY120-380-OPAL-D		14			
TOCH4-SY80-380-FROST-D	DRIVER60	14	60W	3 units (type B) / 6 units (type C) at 230VA	10m
TOC8-SY120-680-OPAL-D		7			
TOC15-SY120-1180-OPAL-D		3			
TOC4-SY120-380-OPAL-D		24			
TOCH4-SY80-80-FROST-D	DRIVER100	24	100W	2 units (type B) / 3 units (type C) at 230VA	10m
TOC8-SY120-680-OPAL-D		12			
TOC15-SY120-1180-OPAL-D		6			



Part of the LUCGCO, group of companies