



# Kingfisher Lighting

Part of the LUCECO group of companies

## Datasheet

### CIVICA 2.0



#### Specification Text

The CIVICA 2.0 shall be manufactured from die-cast aluminium and powder coated in RAL 7016 Marine Grade finish. It shall have a power output ranging between 40 - 60W, with an efficacy of 112lm/W. The luminaire shall deliver 4,048 - 6,600 luminaire lumens. The CIVICA 2.0 has symmetric optics to suit pathway applications. Available in 4000K, the luminaire shall be IK08 and IP66 rated. It shall have photocell and emergency options available.

#### Specification

Weight:	10.4 kg
Windage	0.15 m <sup>2</sup>
Material:	Die-cast Aluminium
Paint Finish:	RAL7016 Anthracite Grey
Embodied Carbon:	88 - 90 kg CO <sub>2</sub> e

#### Product Description

A classic amenity luminaire, CIVICA 2.0 has low colour temperature options alongside an anti glare diffuser to create the ultimate human-centric scheme.




Kingfisher  
Lighting

Part of the LUCECO group of companies

#### Key Features

- 40.0W - 60.0W
- 4,048 - 6,600 Luminaire Lumens
- Efficacy up to 112.0 lm/W
- 2700K, 4000K, CRI>70
- IP65 & IK08
- Lifetime 100,000, L80
- Anti-Glare Diffuser
- Dim to Warm Option

#### Optics



##### Symmetrical 90°

Created to suit many areas of the public realm, this symmetric optic offers a powerful light distribution.

IP65	IK08	Colour Temperature	100,000 hrs LIFETIME	5 YEARS WARRANTY	
PEC	EM	2700K	4000K	Marine Grade Finish	

#### Circular Economy Score

0 to 0.05	Very poor circular economy performance
0.5 to 1.5	Some circular economy functionality
1.5 to 2.5	Definite/substantial progress to circularity
2.5 to 4.0	Excellent circularity

## Other Options Available

Contact for further details


- Photocell Options
- Dim to Warm

## Mounting Options

- Post Top 76mm

Body Type	A	B	C	D
Standard	600	600	426	60/76

All measurements in mm

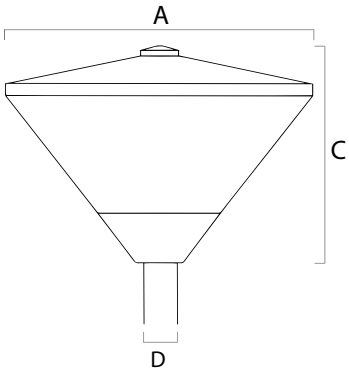

Code	Power	Luminaire Lumens	Drive Current	Inrush Current A pk	Optic	CCT(K)	IP	IK	Weight kg	Driver Included	Driver Type
CIV40D-02	40.0	4,400	1,050	25.0	Symmetrical 90°	4000	IP65	IK08	10.4	Yes	DALI
CIV40D27K-02	40.0	4,048	1,050	25.0		2700	IP65	IK08	10.4	Yes	DALI
CIV60D-02	60.0	6,600	610	32.0		4000	IP65	IK08	10.4	Yes	DALI
CIV60D27K-02	60.0	6,072	610	32.0		2700	IP65	IK08	10.4	Yes	DALI